

DEKRA Test Center

On the safe side

Field survey on tire inflation of
M1 vehicles - May 2018

DEKRA Test Center reference : 17T&E11-149



*DEKRA report reference 17T&E11-149 of survey performed from 1st of February to 9th of February 2018 is only valid in its entirety.
An extraction or partial utilization of results for external publication will be under T&E responsibility.*

© 2016 DEKRA TEST CENTER



Agenda

- Aim of the survey
- General criteria
- Test protocol
- Location of the survey
- Data processing
- Results

Aim of the survey

The aim of this survey is first to collect the actual tire inflations and corresponding tire pressures recommended by the vehicles manufacturers, and then to calculate and draw the distributions of tire underinflations/overinflations, and this for the 3 following groups of vehicles:

- Group “R64 dTPMS vehicles” are vehicles equipped with an UNECE Regulation No. R64 TPMS (Tire Pressure Monitoring System) based on the direct technology (which uses an actual factory calibrated pressure sensor to measure each tire pressure).
- Group “R64 iTPMS vehicles” are vehicles equipped with an UNECE Regulation No. R64 TPMS based on the indirect technology (which uses the ABS/ESP tooth wheel sensors to estimate indirectly each tire pressure based on wheel rotation speed and vibration).
- Group “no TPMS vehicles” are vehicles not equipped with a TPMS nor with a tire puncture detection system.

General criteria

This field survey will be done in 2 different locations : 1 in Portugal and 1 in Italy, and will cover around 1000 vehicles altogether.

It will include only M1 vehicles firstly registered in EU after Nov 1st 2014 in case of Group “R64 dTPMS vehicles” and Group “R64 iTPMS vehicles”.

It will include only M1 vehicles firstly registered in EU after Jan 1st 2009 and before Jan 1st 2014 in case of Group “no TPMS vehicles”.

Test protocol

Data to record

- Date, time and location of the survey
- Vehicle's brand & model
- Vehicle's VIN number
- Vehicle load (partially loaded, fully loaded)
- Tire size
- Tire flange temperature
- Relative tire pressure

Post processed data

- Vehicle's date of 1st registration
- TPMS equipment (dTPMS, iTPMS or no TPMS)
- Recommended tire pressure placard


Test protocol

Equipment used

- Manometer
 - Natech
 - N°IT3471-03
 - Measurement accuracy : 0,05b
 - Daily compared with manometer : AQ336

- Thermometer
 - RS PRO 1327K
 - N° : AQ 368
 - Measurement accuracy : +/- 0.3°C


Test protocol Process*

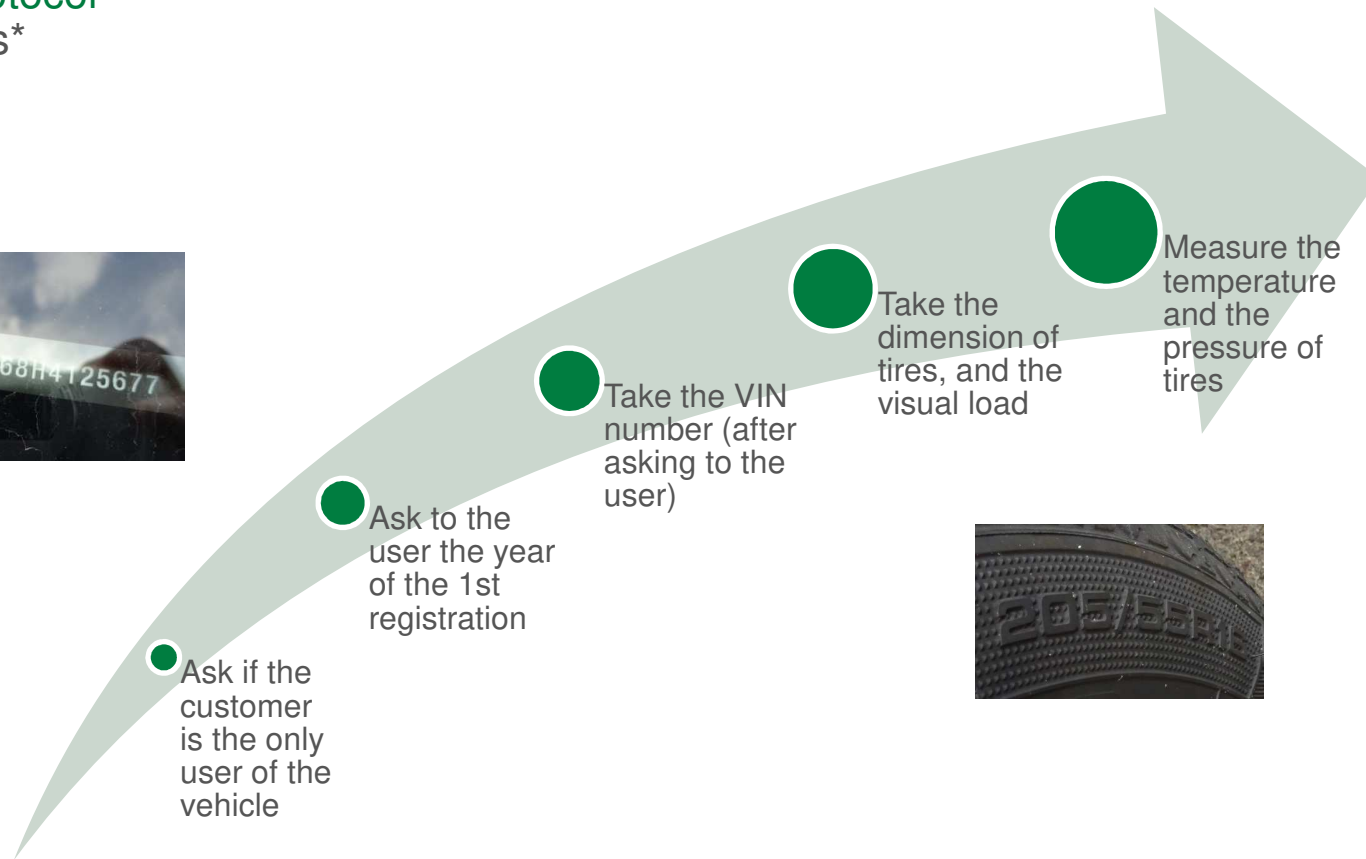

*The process applied by DEKRA Test Center for the survey was discussed, adapted and approved by T&E.

Location of the survey Lisboa, Portugal

The survey took place in a commercial center in Lisboa from the 1st of February to the 09th of February 2018.

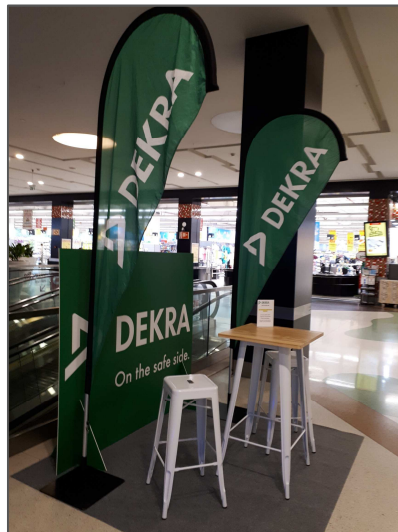

DEKRA Test Center reference :17T&E11-149



Data processing

With the VIN number, some researches are done :

- Check of the date of registration (Internet bank info + car dealership)
- Recommended pressure (Internet bank info + car dealership)
- Type of TPMS (car dealership)

Vehicles are sorted to keep only the vehicles which we have all the exact information, and sorted in 3 groups :

- noTPMS
- dTPMS
- iTPMS

Data processing

Pressure measured is corrected with temperature :

Normalized cold actual tire pressure = ((measured tire pressure + 101) x (measured ambient temperature + 273)/(measured tire flange temperature + 273)) – 101


Then pressure delta is calculated between this normalized cold actual pressure and the recommended pressure for each wheel.

Results

Lisboa

- 418 vehicles validated* with :
 - 219 noTPMS
 - 102 iTPMS
 - 97 dTPMS

418 validated vehicles

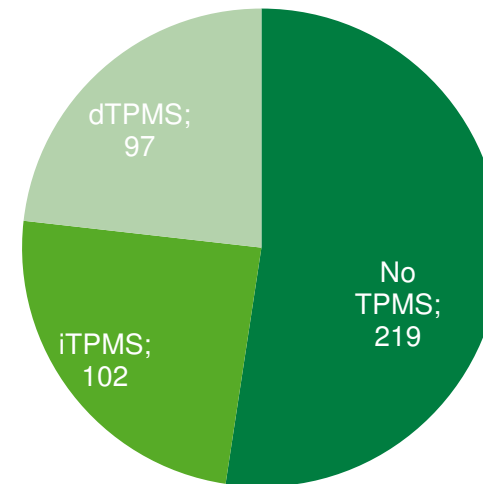

* : Data processing on all measured vehicles requested by T&E (without taking care of balance ratio between each category)

*DEKRA report reference 17T&E11-149 of survey performed from 1st of February to 9th of February 2018 is only valid in its entirety.
An extraction or partial utilization of results for external publication will be under T&E responsibility.*



Results

Lisboa

➤ 418 vehicles validated

*NB: 1 car = 4 wheels

	At least 1 wheel underinflated of 0,3b or more	At least 1 wheel underinflated of 0,5b or more	Wheels underinflated of 0,3b or more	Wheels underinflated of 0,5b or more
No TPMS	42%	20%	24%	10%
iTPMS	27%	7%	16%	3%
dTPMS	26%	7%	13%	3%
TOTAL	35%	14%	20%	7%

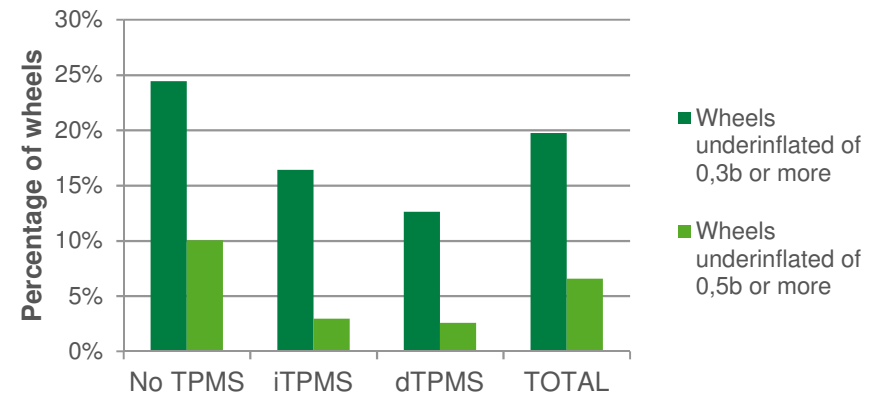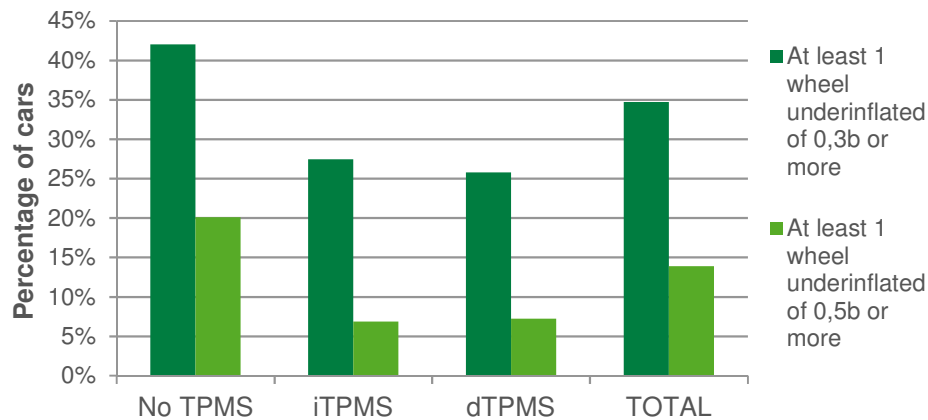


DEKRA report reference 17T&E11-149 of survey performed from 1st of February to 9th of February 2018 is only valid in its entirety. An extraction or partial utilization of results for external publication will be under T&E responsibility.

Results

Lisboa

➤ 418 vehicles validated

	Cars with at least 1 wheel inflated at 1,5b or less
No TPMS	11%
iTPMS	2%
dTPMS	2%
TOTAL	6%

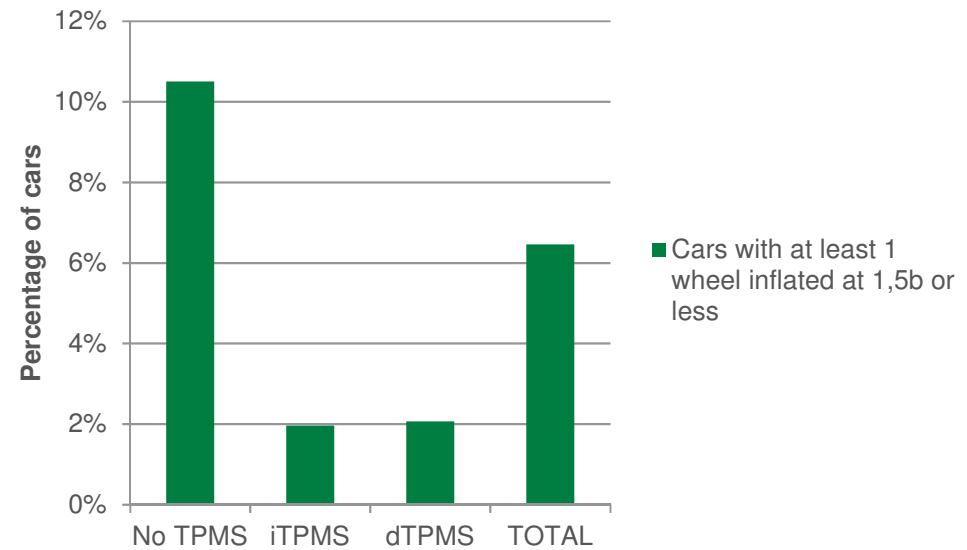


DEKRA report reference 17T&E11-149 of survey performed from 1st of February to 9th of February 2018 is only valid in its entirety. An extraction or partial utilization of results for external publication will be under T&E responsibility.

Results

Lisboa

Distribution of tire pressure per wheel

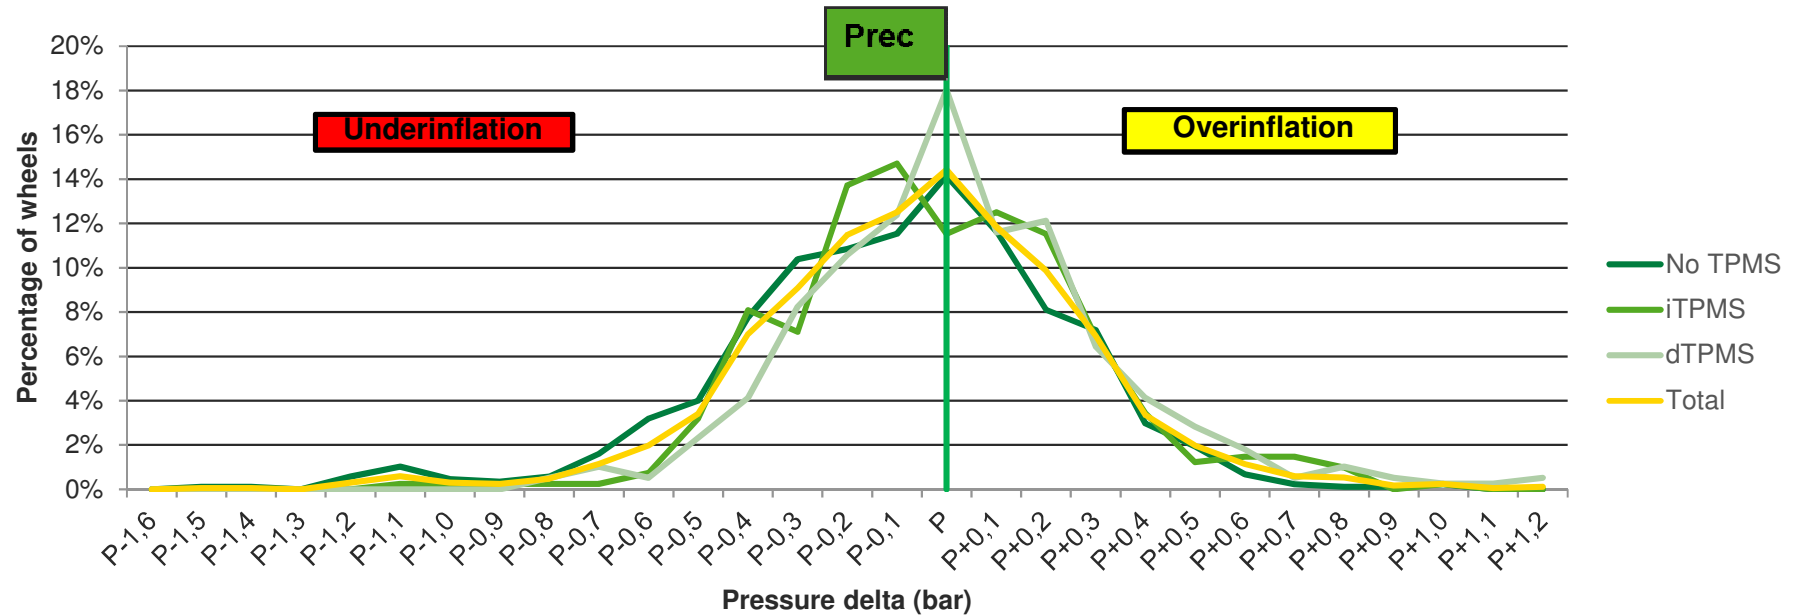

Pressure delta are gathered as follows : $P-0,05b < P < P+0,05b$.


Example : $P+0,4$ gathers pressure delta from $P+0,35$ to $P+0,45$.

DEKRA report reference 17T&E11-149 of survey performed from 1st of February to 9th of February 2018 is only valid in its entirety.
An extraction or partial utilization of results for external publication will be under T&E responsibility.

Results

Lisboa

Distribution of worst tire pressure per car

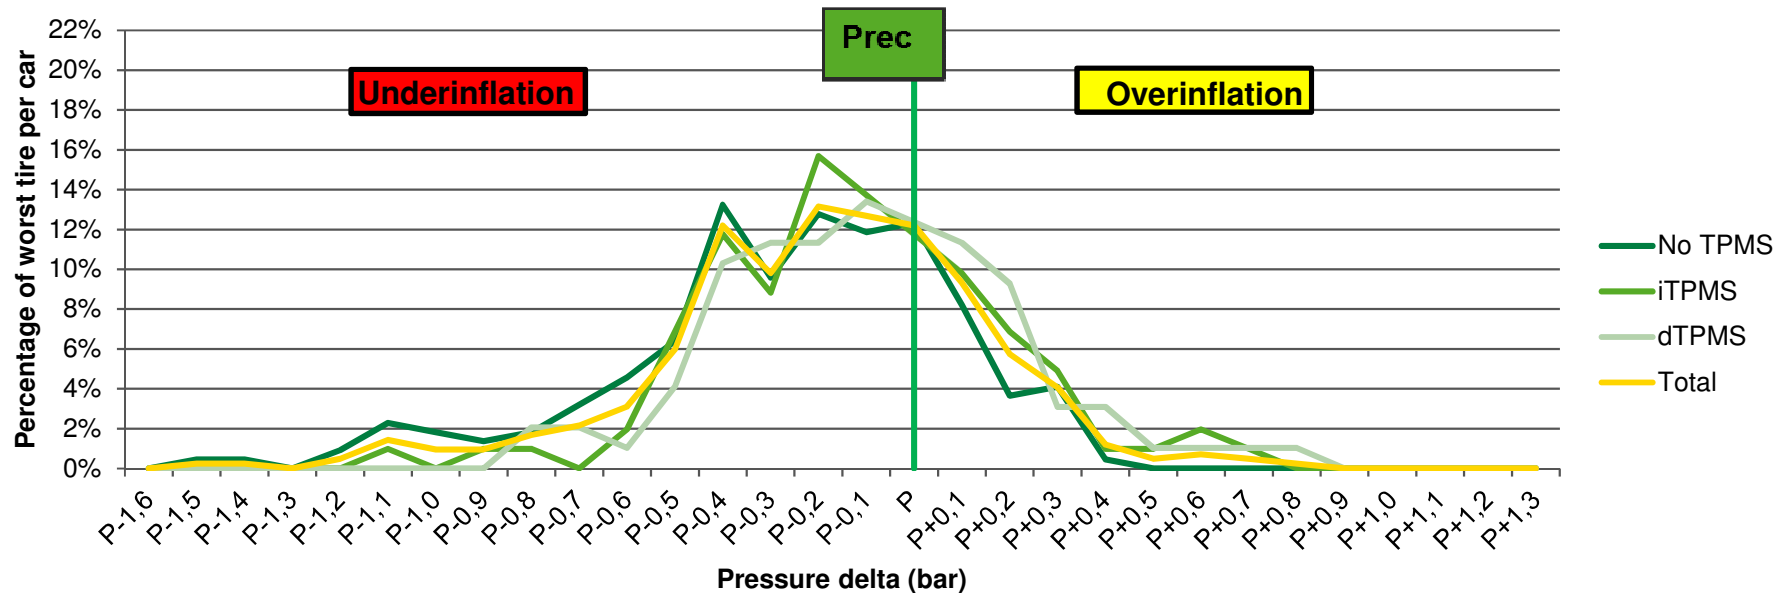

Pressure delta are gathered as follows : $P-0,05b < P < P+0,05b$.

Example : $P+0,4$ gathers pressure delta from $P+0,35$ to $P+0,45$.

DEKRA report reference 17T&E11-149 of survey performed from 1st of February to 9th of February 2018 is only valid in its entirety.
An extraction or partial utilization of results for external publication will be under T&E responsibility.



MISSION
SAFETY

